

Output Ratings

Generating Set Model	SW300P1	SW330E1
380-415V, 50 Hz	300 kVA 240 kW	330 kVA 264 kW

Ratings at 0.8 pf

Ratings Definitions

Prime Power – Model SW300P1

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standby Power – Model SW330E1

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO8528-3).

Technical Data

Engine Model:	Scania DSC1157A
Alternator Model:	GTA 315SI25
Number of Cylinders:	6 in line
Cubic Capacity: litres (cu.in)	11.0 (671)
Bore/Stroke: mm (in)	127 (5.0) / 145 (5.7)
Compression ratio:	15.0:1
Aspiration:	Turbocharged
Frequency:	50 Hz
Engine Speed:	1500 RPM
Gross Engine Power: kW (hp)	330 (442)
BMEP: kPa (psi)	1996 (289)
Piston Speed: m/sec (ft/sec)	7.3 (24.0)
Fuel Tank Capacity: Litres (US gal)	263 (69.5)
Fuel Consump, SW300P1: l/hr (USg/hr)	61.9 (16.4)
Fuel Consump, SW330E1: l/hr (USg/hr)	68.1 (18.0)
Heat Rejection to Exhaust System: kW (Btu/min)	231 (13599)
Heat Rejection to Cooling System: kW (Btu/min)	101 (5744)
Total Radiated Heat: kW (Btu/min)	28.0 (1592)
Exhaust Temperature: °C (°F)	500 (932)
Radiator Cooling	
Air Flow: m ³ /min (cfm)	408 (14408)
Combustion Air Flow: m ³ /min (cfm)	21.7 (766)
Exhaust Gas Flow: m ³ /min (cfm)	60.0 (2118)

Note: Standard reference conditions 27°C (80°F) Air Inlet Temp, 152.4m (500ft) A.S.L. 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

Dimensions and Weights


Length: mm (in)	Width: mm (in)	Height: mm (in)	Dry: kg (lb)	Wet: kg (lb)
3345 (132)	1472 (58.0)	2205 (86.8)	2837 (6241)	2898 (6376)

Dry = With Lube Oil Wet= With Lube Oil and Coolant

Generating set pictured may include optional accessories



www.FGWilson.com

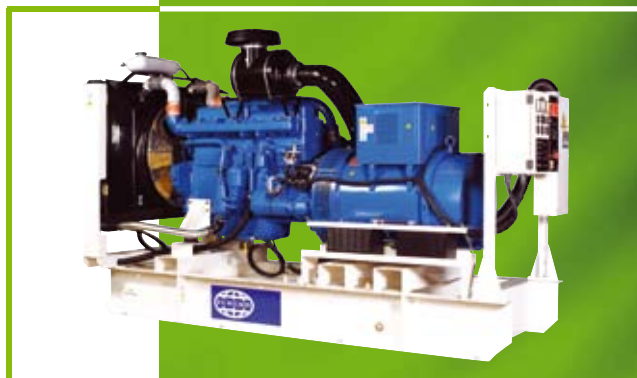

SW300P1-SW330E1



FG Wilson has manufacturing facilities in the following locations:

Northern Ireland • Brazil • China • India • USA

With headquarters in Northern Ireland, FG Wilson operates through a Global Dealer Network. To contact your local Sales Office please visit the FG Wilson website at www.FGWilson.com

