

30kVA P33 Specification Sheet

- Galvanised sound attenuated enclosure
- Battery isolator
- 3-Way fuel valve
- Bunded base tank
- Fork pockets
- Fuel efficient
- Engine: Perkins®
- Alternator: Leroy Somer
- Governor: Electronic
- Control Panel: Power Wizard




Generator shown is indicative and may not be representative of equipment available at the time.

30kVA P33

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Dry (kg)*	Sound Pressure Levels (dBA) 7M 75% Load
30kVA	2102	970	1630	1002	65

*Weight with lube oil, no coolant, no fuel.

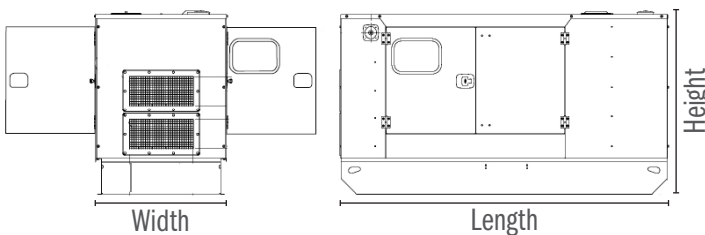

30kVA FUEL SPECIFICATIONS

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
161	4	5.7	7.4

The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.

NORTH WEST DEPOT >> T: 01744 419100
Park Industrial Estate, Gaskell Street, St Helens, WA9 1PX
enquiries@stuartgroup.info

EAST ANGLIA DEPOT & HQ >> T: 01953 454540
Stuart House, Hargham Road, Shropham, Norfolk, NR17 1DT
enquiries@stuartgroup.info

NORTH EAST DEPOT >> T: 01469 551230
Middleplatt Road, Immingham, DN40 1AH
enquiries@stuartgroup.info

WEST MIDLANDS DEPOT >> T: 01905 964499
Diglis Trading Estate, Navigation Road, Worcester, WR5 3DE
enquiries@stuartgroup.info

24/7 EMERGENCY 365 DAYS A YEAR >> 24/7 SUPPORT 365 DAYS A YEAR >> NATIONWIDE COVERAGE 365 DAYS A YEAR >>

