

## 310kVA PRO310-4 Specification Sheet



- EUV Compliant
- 310kVA Prime Power
- DSE 8620 Control Panel
- Battery isolator
- Bunded base tank
- Fork lift pockets
- Fully certified spark arresting silencer
- 50/60 Hz switchable frequency via terminal link
- Diesel emissions fluid (DEF) tank
- Engine: Perkins® 1706J-E93TAG2
- Alternator: Leroy Somer LL5114N
- Governor: Electronic



*Generator shown is indicative and may not be representative of equipment available at the time.*

### 310kVA PRO310-4

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Inc. Fuel (kg)	Sound Pressure Levels (dBA) 7M @ 75% Load
310kVA	4085	1514	2277	4784	65.4

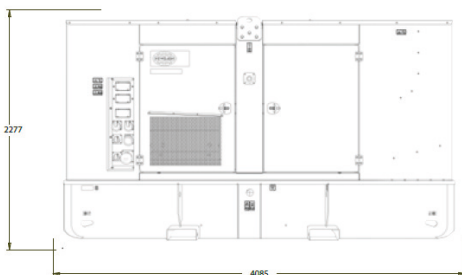

### 310kVA FUEL CAPACITY & CONSUMPTION @ 50HZ

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
667	32.9	46.9	62.6

*The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.*



## POWERING INDUSTRY SOLUTIONS NATIONWIDE

North West Depot  
Park Industrial Estate  
Gasket Street, St Helens  
WA9 1PX

North East Depot  
Middleplatt Road  
Immingham  
DN40 1AH

West Midlands Depot  
Diglis Trading Estate  
Navigation, Road, Worcester  
WR5 3DE

East Anglia Depot  
Stuart House, Hargham Road  
Shropham, Norfolk  
NR17 1DT

