

300kVA PRO Specification Sheet


- Galvanised sound attenuated enclosure
- Battery isolator
- 3-Way fuel valve
- Bunded base tank
- Fork pockets
- Fuel efficient
- Engine: Perkins®
- Alternator: Leroy Somer
- Governor: Electronic
- Control Panel: Deep Sea 8610



300kVA PRO

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Dry (kg)*	Sound Pressure Levels (dBA) 7M 75% Load
300kVA	4065	1400	2124	3880	66.3

*Weight with lube oil, no coolant, no fuel.

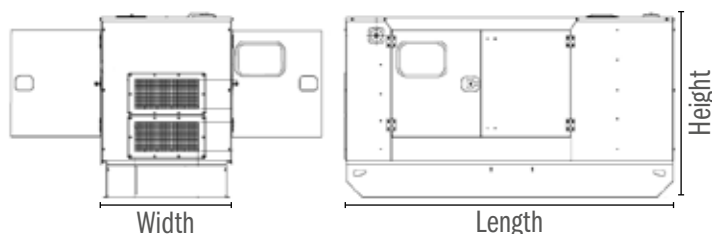

300kVA FUEL SPECIFICATIONS

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
592.6	33.8	47.3	62.5

The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.



24/7 EMERGENCY 365 DAYS A YEAR >> 24/7 SUPPORT 365 DAYS A YEAR >> NATIONWIDE COVERAGE 365 DAYS A YEAR >>

North West Depot
Stuart House, Haydock
Lane, Haydock Industrial
Estate, Merseyside
WA11 9UH

North East Depot
Middleplatt Road
Immingham
DN40 1AH

West Midlands Depot
Diglis Trading Estate
Navigation, Road, Worcester
WR5 3DE

East Anglia Depot
Stuart House, Hargham Road
Shropham, Norfolk
NR17 1DT

