

20kVA PRO20-4 Specification Sheet


- EUV Compliant
- 20kVA Prime Power
- DSE 6320 Control Panel
- Battery isolator
- Bunded base tank
- Fork lift pockets
- Fully certified spark arresting silencer
- Engine: Perkins® 404J-22G
- Alternator: Leroy Somer LL1114M
- Governor: Mechanical



Generator shown is indicative and may not be representative of equipment available at the time.

20kVA PRO20-4

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Inc. Fuel (kg)	Sound Power Levels (dBA) 7M @ 75% Load
20kVA	1718	918	1300	745	65

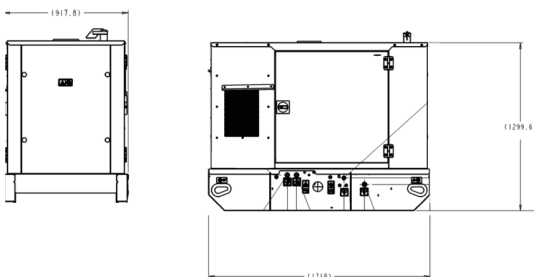

20kVA FUEL CAPACITY & CONSUMPTION @ 50HZ

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
56	3	4	5.5

The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.



POWERING INDUSTRY SOLUTIONS NATIONWIDE

North West Depot
Park Industrial Estate
Gasket Street, St Helens
WA9 1PX

North East Depot
Middleplatt Road
Immingham
DN40 1AH

West Midlands Depot
Diglis Trading Estate
Navigation, Road, Worcester
WR5 3DE

East Anglia Depot
Stuart House, Hargham Road
Shropham, Norfolk
NR17 1DT

