

200kVA PRO200-4 Specification Sheet

- EUV Compliant
- DSE 8610
- Battery isolator
- Bunded base tank
- Fork pockets
- Fully certified spark arresting silencer
- 50/60 Hz switchable frequency via terminal link
- Diesel emissions fluid (DEF) tank
- Engine: Perkins® 1206J-E70TTAG
- Alternator: Leroy Somer
- Governor: Electronic




Generator shown is indicative and may not be representative of equipment available at the time.

200kVA PRO200-4

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Dry (kg)*	Sound Pressure Levels (dBA) 7M 75% Load
200kVA	4085	1420	2367	3651	64.6

*Weight with lube oil, no coolant, no fuel.

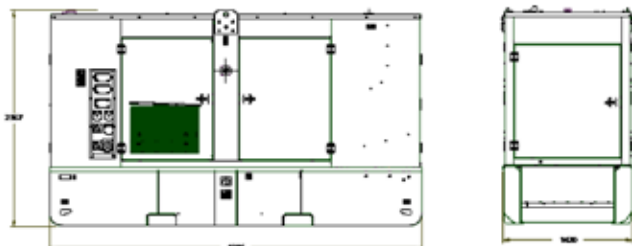

200kVA FUEL SPECIFICATIONS

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
822	22.1	32.4	43.4

The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.



POWERING INDUSTRY SOLUTIONS NATIONWIDE

North West Depot
Park Industrial Estate
Gasket Street, St Helens
WA9 1PX

North East Depot
Middleplatt Road
Immingham
DN40 1AH

West Midlands Depot
Diglis Trading Estate
Navigation, Road, Worcester
WR5 3DE

East Anglia Depot
Stuart House, Hargham Road
Shropham, Norfolk
NR17 1DT

