

400kVA P400 Specification Sheet

- Galvanised sound attenuated enclosure
- Battery isolator
- 3-Way fuel valve
- Bunded base tank
- Fork pockets
- Fuel efficient
- Engine: Perkins®
- Alternator: Leroy Somer
- Governor: Electronic
- Control Panel: Deep Sea & Power Wizard




Generator shown is indicative and may not be representative of equipment available at the time.

400kVA P400

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Dry (kg)*	Sound Pressure Levels (dBA) 7M 75% Load
400kVA	4930	1658	2422	4655	69

*Weight with lube oil, no coolant, no fuel.

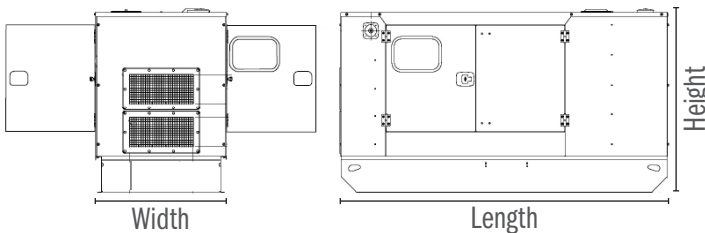

400kVA FUEL SPECIFICATIONS

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
887	36.2	53	69.6

The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.



24/7 EMERGENCY 365 DAYS A YEAR >> 24/7 SUPPORT 365 DAYS A YEAR >> NATIONWIDE COVERAGE 365 DAYS A YEAR >>



North West Depot
Stuart House, Haydock
Lane, Haydock Industrial
Estate, Merseyside
WA11 9UH

North East Depot
Middleplatt Road
Immingham
DN40 1AH

West Midlands Depot
Diglis Trading Estate
Navigation, Road, Worcester
WR5 3DE

East Anglia Depot
Stuart House, Hargham Road
Shropham, Norfolk
NR17 1DT