

## 100kVA XD Specification Sheet

- Galvanised sound attenuated enclosure
- Battery isolator
- 3-Way fuel valve
- Bunded base tank
- Fork pockets
- Fuel efficient
- Engine: Perkins®
- Alternator: Leroy Somer
- Governor: Electronic
- Control Panel: Power Wizard




Generator shown is indicative and may not be representative of equipment available at the time.

### 100kVA XD

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Dry (kg)*	Sound Pressure Levels (dBA) 7M 75% Load
100kVA	3324	1230	1957	2774	64.8

\*Weight with lube oil, no coolant, no fuel.

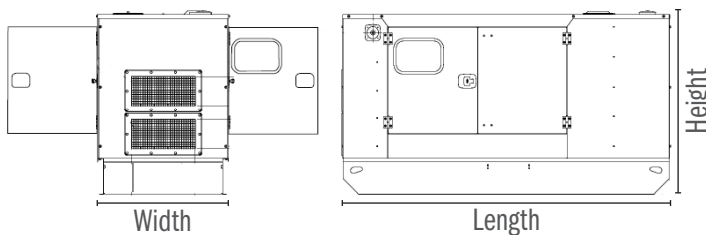

### 100kVA FUEL SPECIFICATIONS

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
662	13	19	23.9

The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.

**NORTH WEST DEPOT >> T: 01744 419100**

Park Industrial Estate, Gaskell Street, St Helens, WA9 1PX  
[enquiries@stuartgroup.info](mailto:enquiries@stuartgroup.info)

**EAST ANGLIA DEPOT & HQ >> T: 01953 454540**

Stuart House, Hargham Road, Shropham, Norfolk, NR17 1DT  
[enquiries@stuartgroup.info](mailto:enquiries@stuartgroup.info)

**NORTH EAST DEPOT >> T: 01469 551230**

Middleplatt Road, Immingham, DN40 1AH  
[enquiries@stuartgroup.info](mailto:enquiries@stuartgroup.info)

**WEST MIDLANDS DEPOT >> T: 01905 964499**

Diglis Trading Estate, Navigation Road, Worcester, WR5 3DE  
[enquiries@stuartgroup.info](mailto:enquiries@stuartgroup.info)

**24/7 EMERGENCY 365 DAYS A YEAR >> 24/7 SUPPORT 365 DAYS A YEAR >> NATIONWIDE COVERAGE 365 DAYS A YEAR >>**

