

## 100kVA PRO Specification Sheet

- Galvanised sound attenuated enclosure
- Battery isolator
- 3-Way fuel valve
- Bunded base tank
- Fork pockets
- Fuel efficient
- Engine: Perkins®
- Alternator: Leroy Somer
- Governor: Electronic
- Control Panel: Power Wizard




Generator shown is indicative and may not be representative of equipment available at the time.

### 100kVA PRO

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Dry (kg)*	Sound Pressure Levels (dBA) 7M 75% Load
100kVA	2770	1120	1847	2027	67.2

\*Weight with lube oil, no coolant, no fuel.

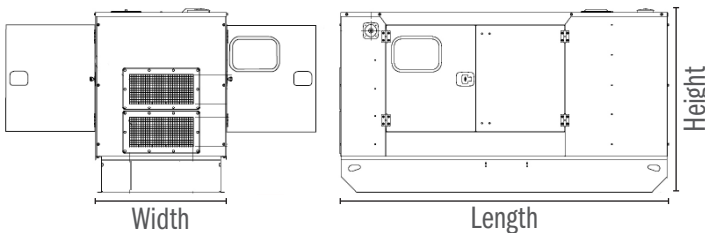

### 100kVA FUEL SPECIFICATIONS

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
410	14.6	20.4	23.5

The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.



24/7 EMERGENCY 365 DAYS A YEAR >> 24/7 SUPPORT 365 DAYS A YEAR >> NATIONWIDE COVERAGE 365 DAYS A YEAR >>



North West Depot  
Stuart House, Haydock  
Lane, Haydock Industrial  
Estate, Merseyside  
WA11 9UH

North East Depot  
Middleplatt Road  
Immingham  
DN40 1AH

West Midlands Depot  
Diglis Trading Estate  
Navigation, Road, Worcester  
WR5 3DE

East Anglia Depot  
Stuart House, Hargham Road  
Shropham, Norfolk  
NR17 1DT