

400kVA P400 Specification Sheet

- Galvanised sound attenuated enclosure
- Battery isolator
- 3-Way fuel valve
- Bunded base tank
- Fork pockets
- Fuel efficient
- Engine: Perkins®
- Alternator: Leroy Somer
- Governor: Electronic
- Control Panel: Deep Sea & Power Wizard




Generator shown is indicative and may not be representative of equipment available at the time.

400kVA P400

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Dry (kg)*	Sound Pressure Levels (dBA) 7M 75% Load
400kVA	4930	1658	2422	4655	69

*Weight with lube oil, no coolant, no fuel.

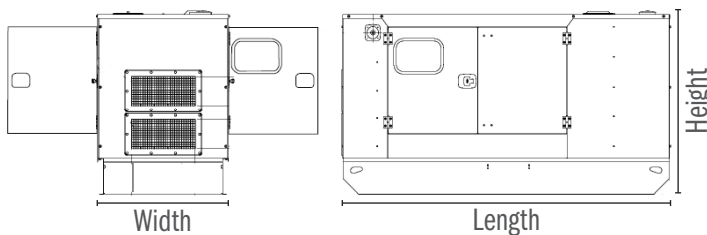

400kVA FUEL SPECIFICATIONS

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
887	36.2	53	69.6

The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.

NORTH WEST DEPOT >> T: 01744 419100

Park Industrial Estate, Gaskell Street, St Helens, WA9 1PX
enquiries@stuartgroup.info

EAST ANGLIA DEPOT & HQ >> T: 01953 454540

Stuart House, Hargham Road, Shropham, Norfolk, NR17 1DT
enquiries@stuartgroup.info

NORTH EAST DEPOT >> T: 01469 551230

Middleplatt Road, Immingham, DN40 1AH
enquiries@stuartgroup.info

WEST MIDLANDS DEPOT >> T: 01905 964499

Diglis Trading Estate, Navigation Road, Worcester, WR5 3DE
enquiries@stuartgroup.info

24/7 EMERGENCY 365 DAYS A YEAR >> 24/7 SUPPORT 365 DAYS A YEAR >> NATIONWIDE COVERAGE 365 DAYS A YEAR >>

