

1250kVA FQ1400C Specification Sheet

- Custom Built Super Silent Container
- Battery Isolator
- 3-Way Fuel Valve
- Bund Alarm
- 4 Point Roof Lift
- Forklift Pockets
- 3 lines of Power Lock connection
- Spark Arrestor Muffler
- Amot Valve
- DSE Gateway
- 50/60Hz Switchable
- Engine: Cummins KTA503
- Alternator: Leroy Somer 50.1M7/1325
- Governor: Electronic
- Control Panel: Deep Sea 8610




Generator shown is indicative and may not be representative of equipment available at the time.

1250kVA FQ1400C

Size kVA	Length (mm)	Width (mm)	Height (mm)	Weight Dry (kg)*	Sound Pressure Levels (dBA) 1M 100% Load
1250kVA	6055	2434	2896	17300	75

*Weight with lube oil. no coolant. no fuel.

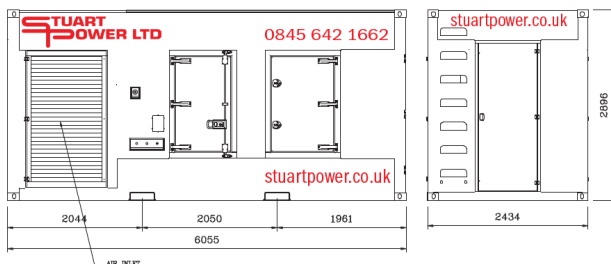

1250kVA FUEL SPECIFICATIONS

Fuel Capacity (Lt)	50% Load (LPH)	75% Load (LPH)	100% Load (LPH)
2000	139	199	261

The Company reserves the right, prior to the delivery date to substitute the equipment with an alternative providing no less power than stated above.

NORTH WEST DEPOT >> T: 01744 419100

Park Industrial Estate, Gaskell Street, St Helens, WA9 1PX
enquiries@stuartgroup.info

EAST ANGLIA DEPOT & HQ >> T: 01953 454540

Stuart House, Hargham Road, Shropham, Norfolk, NR17 1DT
enquiries@stuartgroup.info

NORTH EAST DEPOT >> T: 01469 551230

Middleplatt Road, Immingham, DN40 1AH
enquiries@stuartgroup.info

WEST MIDLANDS DEPOT >> T: 01905 964499

Diglis Trading Estate, Navigation Road, Worcester, WR5 3DE
enquiries@stuartgroup.info

24/7 EMERGENCY 365 DAYS A YEAR >> 24/7 SUPPORT 365 DAYS A YEAR >> NATIONWIDE COVERAGE 365 DAYS A YEAR >>

